


30W AC LED STREET LIGHT

DATASHEET

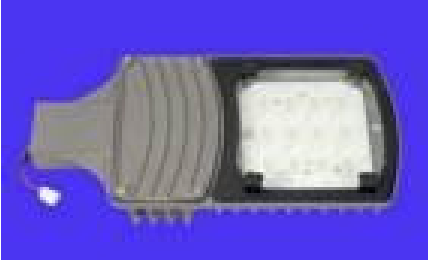

Actual Product Image May Differ

Applications:

Area: Outdoor

Purpose: Street and Roadway Lighting.

Features:

(1) Optical

- » Optical pattern meets all standard Street Light Standards. **Actual Product Image May Differ**
- » Uniform illuminance distribution.

(2) Power

- » Switched mode constant current power supply.
- » Over-heat, Over-voltage, Over-current protections are provided.
- » Lightning Protection provided.

(3) Thermal

- » Luminaire surface temperature is 48°C @ Ta=30°C, the temperature variation is controlled under 5°C.
- » Junction temperature is controlled at 70°C @ Ta=30.
- » Overheat protection will operate to adjust as the LED module surface reaches 80°C.

(4) Luminaire

- » Optimized thermal design to ensure maximum life to LED. The Heat sink grade aluminium has the highest surface area for efficient heat diffusion and the entire luminaire with Aluminium acts as heat sink.
- » Dust and water protection design meeting IP65 standards.
- » Super-high luminaire efficacy.

DETAILED TECHNICAL SPECIFICATION

Electrical Characteristics:

PARAMETER	DRIVER RESULT
Input Voltage	160 -260 VAC
Rated Power	30W
Maximum Power	35W
Efficiency	>85%
Power Factor	>0.9
Voltage Harmonics (THD)	<5%
Current Harmonics (THD)	<10%

Operating Conditions:

Operating Frequency	100kHz to 200KHz
Operating Temperature Range	-25°C to +70°C
Storage Temperature Range	-65°C to 125°C
Humidity	95% RH

LED Details:

Led Make	OSRAM/CREE/PHILIPS
No Of LED's	12
Led Viewing Angle	120° by using reflector
Colour Temperature	Cool White (5500 to 6500K)
Luminous Flux	>3300 Lumens
Life Span	> 50,000 Hours
Colour Rendering Index	>70 Ra

LED Luminary Details:

Body	Sleek Body
Heat Sink	Optimized thermal design to ensure maximum life to LED. The Heat sink grade aluminium has the highest surface area for efficient heat diffusion and the entire luminary with Aluminium acts as heat sink.
Dust and Water protection	IP 65 Standards

Protection Parameters:

Over-Current Protection	Inbuilt
Short-Circuit Protection	Inbuilt
Over-Voltage Protection	Inbuilt
Over-Temperature Protection	135 °C
Dust and Water Protection	IP 65
Lightning Protection	Inbuilt

GLOBTEL CONVERGENCE LTD

190 G, R K Building, Khetwadi Main
Road, Mumbai 400004

INDIA

Tel No: +91 22 40426440

Fax No: +91 22 66376440

Email: sales@gloabtel.com